

Flexible Modular Design.








The name says it all: EZ to reconfigure & designed with your Future Needs in mind. We think it's the best FN hoist around.

Fastest lead time in the industry – from raw materials to test bed in 10 hours

Ready to use for single line, dual line lift, or roll-on/roll-off configuration

Designed to be practical, durable, reliable, modular, easy to install and service Redundant, manually releasable brakes featuring quiet operation. Comes standard with battery powered brake release.

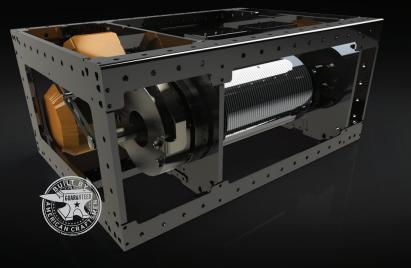


Can be used with eZ-Hoist single axis controls or Raynok control system. We can also provide encoders and plugs to work with ANY control system.


Made using only top of the line components from SEW, Mayr, Igus, TER, Dodge, Martin, Harting and, of course, ZFX.

Ergonomically placed limit switches. Indicator lights display when limits are open or closed -- no more listening for clicks! Built-in screwdriver for adjusting limits.

## ezHoist ezFN

	STANDARD	OPTIONAL
Voltage	208vac, 60hz	380-420, 480vac, 50/60hz
Load Capacity	250lbs (114kg)	Nearly infinite options
Speed	8 ft/s (2,4 m/s)	Nearly infinite options
Lift with single line	156 ft (47 m)	Nearly infinite options
Lift with dual lines	2 x 75 ft (2 x 23 m)	Nearly infinite options
Rope Diameter	5/32" (4mm)	3/16" (5mm), 1/4" (6mm)
Brake Coil	24vdc	208-230, 380-420, 480 vac
Encoder	Hiperface	SSI, EnDat
Weight	300 lbs (136 kg)	







14″ 35,5 см	
	s -

DEVELOPMENT FACILITY 611 Industry Road I Louisville, KY 40208 tel: 502.637.2500 I fax: 502.637.7878

EUROPEAN OPERATIONS Veldzigt 3 3454 PW De Meern The Netherlands tel: +31(0)30-2428280